


GALAXY SPECIFICATIONS

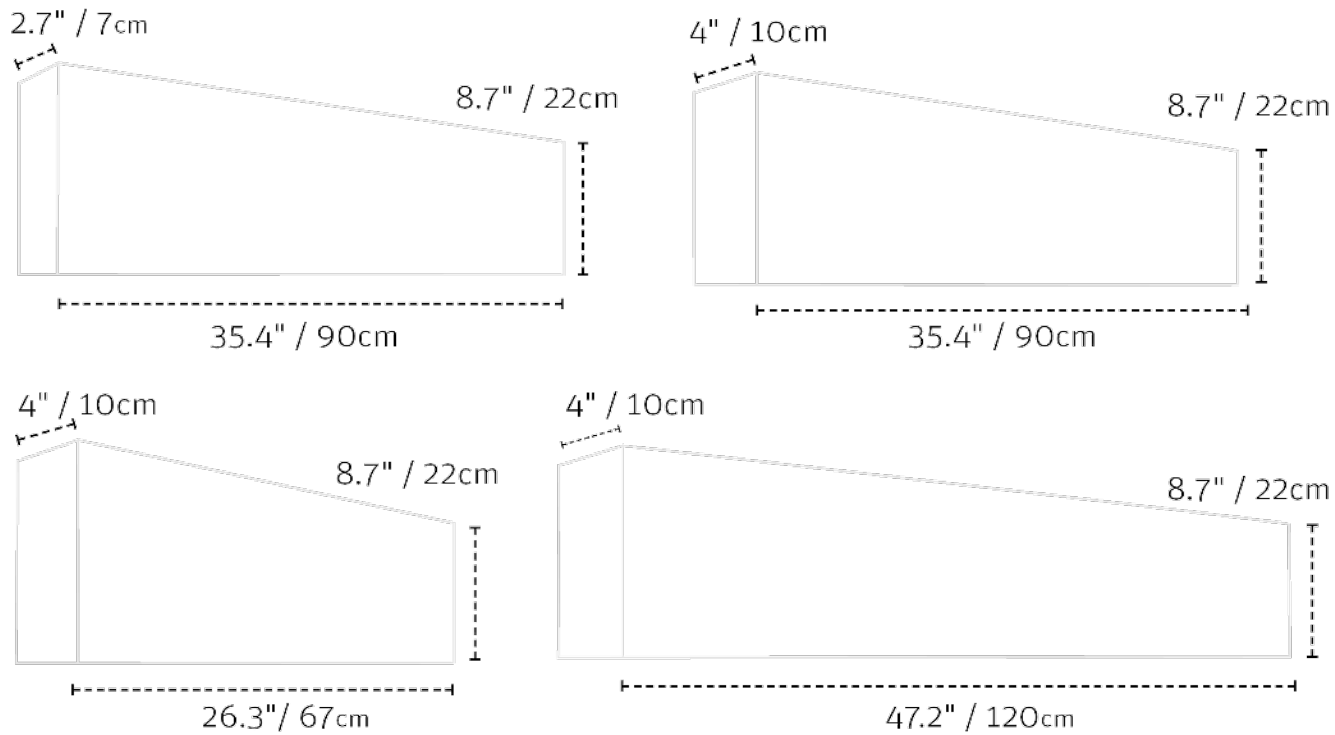

GENERAL INFORMATION	
SKU:	SML-1529, 1511, 1913, 1539
Collection:	Galaxy
Class:	Suspended Pendant Light
Materials:	Glass, metal
UL, CSA ID	E300046-0002-C00

MEASUREMENTS & WEIGHT					
	26x3.9"	35x3.9"	35x2.7	47x3.9"	47x2.7"
SML	1529	1511	1913	1539	15392
Pendant size	26.37*3.93*8.66"	35*3.93*8.66"	35*2.7*8.66"	47*3.93*8.66"	47*2.7*8.66"
	67x10x20cm	90x10x20cm	90x7x20cm	90x10x20cm	90x7x20cm
Overall Weight	14lb I 6.5kg	16lb I 7.5kg	17lb I 8kg	21lb I 9.5kg	19lb I 8.5kg
Ceiling plate size	26x3.9" or 4.7"	35x3.9" or 4.7"	35x3.9" or 4.7"	47x3.9" or 4.7"	26x3.9" or 4.7"
Cords	Tinned copper covered transparent Teflon				
Cords length	Up to 35ft long I 10m.				
	Pre-set in cascading different lengths Adjustable.				
Compatible with	Slope I peaked I skylight I beam				

LAMPING SPEC

	26x3.9"	35x3.9"	35x2.7	47x3.9"	47x2.7"
Light source	Led E26/E27	Led E26/E27	Strip led	Led E26/E27	Strip led
Amount	3	4	3.5m	5	3.5m
Wattage single bulb	12W	12W	20W	12W	20W
Working Voltage	AC 120-240V	AC 120-240V	DC24V	AC 120-240V	DC24V
Total Lumens	3x1350=4050	4x1350=5,400	7700	5x1350=6,750	7700
CRI	80				
Color temperature:	3000k warm white				
Beam Angle			120°		120°
Driver requires:	NO	NO	YES. Included	NO	YES. Included
Dimming	Dimmable, any dimming switch, TRIAC included				
Bulb included	YES				
Lifespan(Hrs)	30,000	30,000	50,000	30,000	50,000

ELECTRICAL REQUIREMENTS - INSTALLATION

Voltage:	120v I 240V
Location:	Dry location only
Power Source:	Hardwired
Wiring:	Single electrical outlet
Dimming:	Dimmable, any dimming switch, TRIAC included
Electrical rating:	Input: 120Vac, 60Hz, 0.61A.
Assembly Required	Glasses only
Installation instructions:	https://drive.google.com/file/d/14n2Kf411Xxf4OrxQKyin-TIsEwQgZnNJ/view?usp=drive_link