



Flush ceiling light • Wall sconces

Assembly Instructions

In the box:

- Fixture
- Glasses
- Black pocket “Installation kit”

keep the ‘installation kit’ until you’ve confirmed all components are present

For USA: This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

For CANADA: ce produit doit être installé selon le code d’installation pertinent, par une personne qui connaît bien le produit et son fonctionnement ainsi que les risques inhérents.



Preparation:


1. Determine your wall / ceiling type (wood, drywall, or concrete) and use the appropriate screws. For drywall, locate ceiling joists and make sure the screws go beyond the drywall into the joist. For concrete, use masonry anchor screws.



Before starting installation, Turn off the relevant electrical power source to ensure safety. !


Installation:

1. Open the box and unwrap the ceiling fixture. Be careful with the side glasses that are attached separately and make sure not to break them. Keep the glass for the sides of the fixture on the side until the fixture is installed to the ceiling. >>

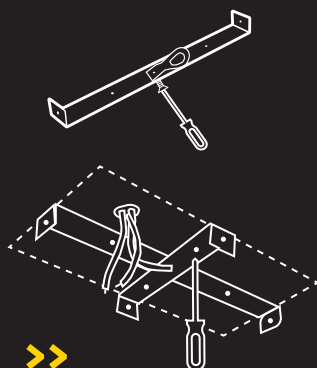

2. Twist the GND wire coming out of your electrical box with the GND wire of the light fixture. Use the twist connector attached to the GND wire from the bracket. In fixture with a LED driver (US/Ca) connect the GND wire from the driver as well.

3. For the next stage you will need a second person to help you hold the fixture up while you connect the electrical wire to the fixture.



4. Lift the main (or upper if two) canopy and hold it close to the bracket while connecting the wires.
5. Connect the positive and negative wires from your electrical box with the respective wires from the Fixture. Use the twist connector attached to the wires.
6. Carefully position the canopy on to the bracket and fasten it into place using the pre-existing holes.
7. Before installing the glasses, make sure to verify that everything is functioning properly.



Assembly of glass:

1. Carefully position the glass panel onto the bracket and fasten it into place using the pre-existing holes.
2. For ceiling mount - It is crucial to hold the glass only from the edges of the bigger glass pallet, and not from the middle, to avoid any damage or breakage.
3. For a ceiling mount-attach the sides glasses using the screws provided between the ceiling and canopy.

ENJOY!

WhatsApp: +972-52-5279674 • Email: miri@shimale.co.il
www.shimale.co.il • www.etsy.com/shop/shimaleLightArt



SHIMALE PELEG
LIGHT IN ART

